


SLEEVE TO BE INSTALLED IN ACCORDANCE WITH MANUFACTURERS DIRECTIONS.

FOR HYDRANTS UNPROTECTED BY CURB:
 BOLLARDS SHALL BE A MINIMUM 1.3m MEASURED FROM THE CENTRE OF THE HYDRANT TO CENTRE OF BOLLARDS. OFFSET BOLLARDS FROM HYDRANT PORTS TO ALLOW FOR EASE OF HOSE CONNECTIONS.

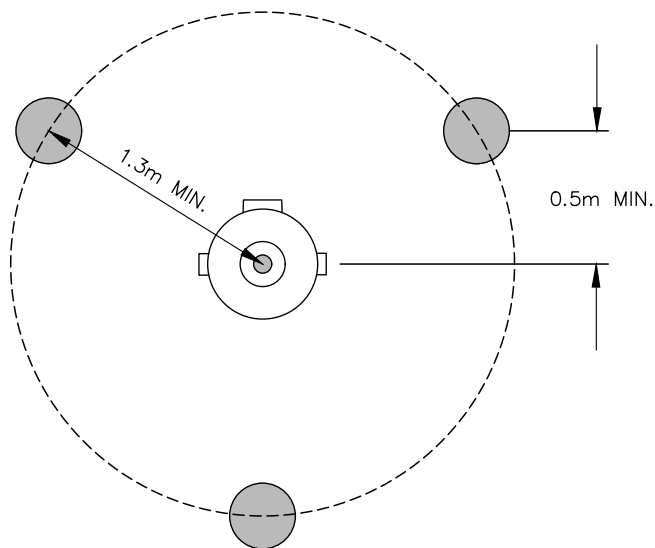

OPTIONAL REAR BOLLARD
 WHERE VEHICLE ACCESS IS POSSIBLE

NOTE: REMOVABLE BOLLARDS TO BE INSTALLED WITH RECEIVER ASSEMBLY WITH HINGED LID AS PER APPROVED PRODUCTS LIST

**STANDARD
 DETAIL
 DRAWING**

DATE:
 JUN 24/24

SCALE:
 NTS

**PERMANENT BOLLARD
 (BARRIER POST)**

DWG. NO.

SS-C12b

